


「 **ADD** | INNOVATION  
+ SUPPLIER 」

LUMINAIRES CATALOG 2021  
**RESIDENTIAL BUILDINGS**



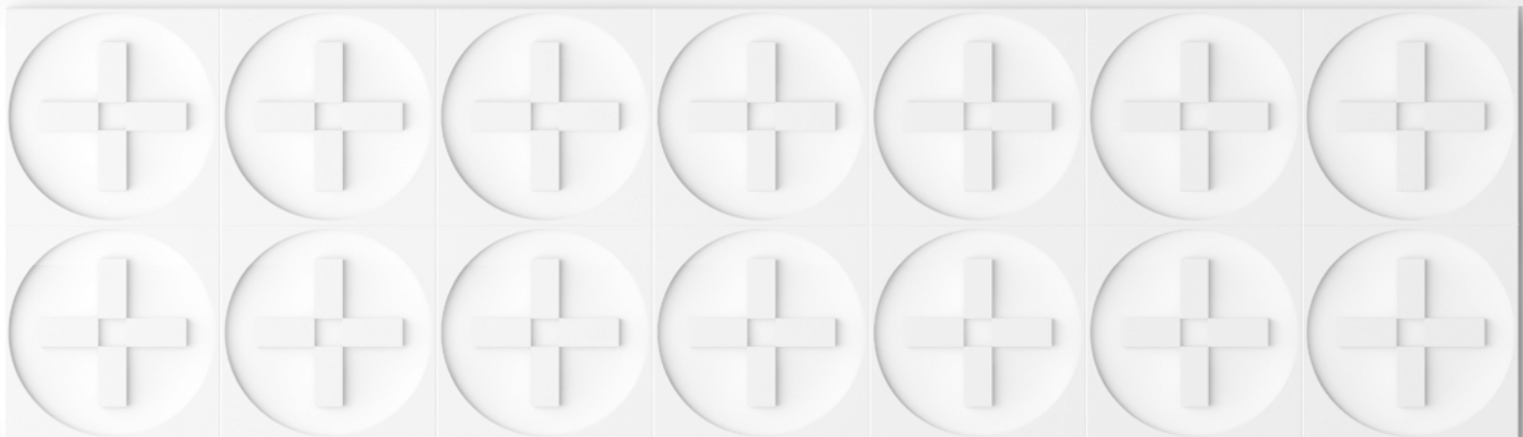

ADD is not only a modern lighting technology, energy savings, ecology, design but most of all a cooperation of people of different cultures. We provide specialists who want to become our team partners with innovative and reliable solutions. We build our relations with the aim of achieving a long-term success.

Fresh view at the technical aspects that are crucial for both mounters and users gives us the opportunity to offer original and state-of-the-art solutions. A simple form and solid materials are key advantages that allow designers to create a modern space through the light and the form of fixtures. Our wide range of product lines and collections help designers to create perfect compositions.

***WE INVITE YOU TO COOPERATE WITH US ON YOUR PROJECTS***

*ADD Team*



[www.addsupplier.com](http://www.addsupplier.com)



Product index **04**

Ceiling luminaires **08**

Wall luminaires **22**

Linear luminaires **31**

Technical luminaires **44**

Evacuation luminaires **51**

Outdoor luminaires **72**





PLAFO **10**



CORIA **11**




SATURN **12**




DEIMOS **13**



COMPACT N **14**



MADERA **15**



ARTO N **16**



COMPACT P **17**




RONDO 90 **18**



RONDO F 95 **19**



RONDO 250 **20**



RONDO F 175 **21**



FOCUS **22**



DL R 225 **23**



DL SQ 225 **24**



LUMOS **25**



KARDAN **26**



SIMPLE **27**






WALL SQ 30



CASE SQ 31



WALL LINEAR 32



BARIS 33



WALL SPOT 34



AQUA SQ 35



AQUA 36



SLIM 39



RAY 40



LIN 41



LIN-T 42




LIN-45 43



IDEO LOW 44




IDEO 45



INSO 46




INDILED A 47



IDEO IN 48



SPACE 49



LED TAPES 50



TECHNICAL LUMINAIRES  
51 - 57



FORTIMO 53



PROFI 60 54



BAR 55



TYTAN 2 56



MIMO 2 57

EVACUATION LUMINAIRES  
EMERGENCY  
58 - 69



ONTEC D 60



ONTEC C 61



DOT CR 62



DOT CS 63



ARROW ARNS 64



ARROW ARPS 65



ARROW ARN 66



ARROW ARP 67



ONTEC S C1 68



EXIT S 69



EVACUATION LUMINAIRES  
ROUTE DIRECTION

70 - 76




ONTEC S M1 70



ONTEC E 71




INFINITY II B 72



INFINITY II AL 73



ONTEC G 74



INFINITY II AW 75



ONTEC R 76

OUTDOOR LUMINAIRES

77 - 90



PROFI 60 79



FORTIMO 80



FORTIMO R 81



FIB 82



DLN100 U-D 83



KASTEL 84



ART DECK 85



ALT RAY 86



ECRAN 87




FRAME H650 88



LTD LINE 89



LUMILINE 90

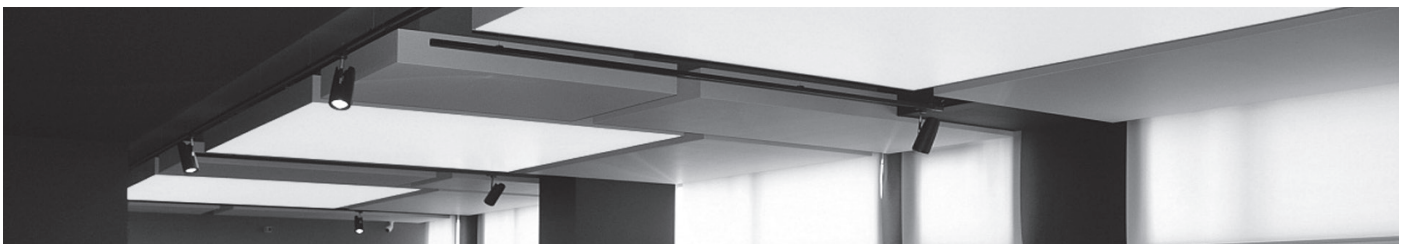





# CEILING LUMINAIRES

PLAFO	10
CORIA	11
SATURN	12
DEIMOS	13
COMPACT N	14
MADERA	15
ARTO N	16
COMPACT P	17
RONDO 90	18
RONDO F 95	19
RONDO 250	20
RONDO F 175	21
FOCUS	22
DL R 225	23
DL SQ 225	24
LUMOS	25
KARDAN	26
SIMPLE	27



<b>Mounting type</b>	Surface / Suspended
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP20 in standard / IP44 on request
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Standard Gray RAL 9006, other RAL colours on request
<b>Drivers</b>	Electronic driver in standard, DALI on request
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard. Frosted / microprismatic diffuser on request
<b>Temperature range</b>	0°C ... +40°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
21	3000	2500	>80	230	50 000	IP20	Ø300x100	3512.PND.2500/830
21	4000	2500	>80	230	50 000	IP20	Ø300x100	3512.PND.2500/840
40	3000	5000	>80	230	50 000	IP20	Ø500x100	4227.PND.5000/830
40	4000	5000	>80	230	50 000	IP20	Ø500x100	4227.PND.5000/840
76	3000	12000	>80	230	50 000	IP20	Ø900x100	3515.PND.12000/830
76	4000	12000	>80	230	50 000	IP20	Ø900x100	3515.PND.12000/840

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>









# CORIA



<b>Mounting type</b>	Surface / Recessed / Suspended
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP40 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	White / black in standard, other RAL colours on request
<b>Drivers</b>	No driver in standard, DALI on request.
<b>Housing material</b>	Steel
<b>Diffuser material</b>	OPAL diffuser in standard. Frosted / microprismatic diffuser on request
<b>Temperature range</b>	-17°C ... +35°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
50	3000	4700	>80	230	50 000	IP44	Ø600x86	555015
50	4000	5050	>80	230	50 000	IP44	Ø600x86	555190
22	3000	1750	>80	230	50 000	IP44	Ø400x86	555022
22	4000	1900	>80	230	50 000	IP44	Ø400x86	555206

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	<b>IP40</b>	IP65



# SATURN



<b>Mounting type</b>	Surface / Suspended
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP20 in standard. IP44 on request
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Standard Gray RAL 9006, other RAL colours on request.
<b>Drivers</b>	Electronic driver in standard, DALI on request.
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard. Frosted / microprismatic diffuser on request
<b>Temperature range</b>	0°C ... +40°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
41	3000	4200	>80	230	50 000	IP20	Ø500x90	6570.4200/830
41	4000	4200	>80	230	50 000	IP20	Ø500x90	6570.4200/840

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP44	IP65
	IP20	IP44	IP65
	IP20	IP44	IP65




# DEIMOS



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP40 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	White / black in standard, other RAL colours on request
<b>Drivers</b>	No driver in standard, DALI on request
<b>Housing material</b>	Plastic
<b>Diffuser material</b>	OPAL diffuser in standard.
<b>Temperature range</b>	-20°C ... +35°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
12	3000	1400	>80	230	75 000	IP40	Ø400x100	073724
12	4000	1500	>80	230	75 000	IP40	Ø400x100	073748
20	3000	2200	>80	230	75 000	IP40	Ø400x100	073649
20	4000	2350	>80	230	75 000	IP40	Ø400x100	073663
26	3000	2850	>80	230	75 000	IP40	Ø400x100	073847
26	4000	3100	>80	230	75 000	IP40	Ø400x100	073885

<b>Mounting type</b>
<b>Distribution direction</b>
<b>IP Code</b>

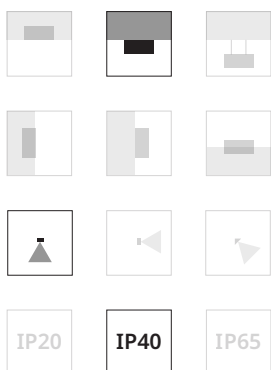

# COMPACT N




<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP65 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	White / black in standard, other RAL colours on request
<b>Drivers</b>	DALI on request
<b>Housing material</b>	Plastic
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser on request
<b>Temperature range</b>	-20°C ... +25°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
24	4000	2950	>80	230	84 000	IP65	620x620x66	628245
32	4000	3800	>80	230	84 000	IP65	620x620x66	628207

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP44	IP65
	IP20	IP44	IP65
	IP20	IP44	IP65



# MADERA

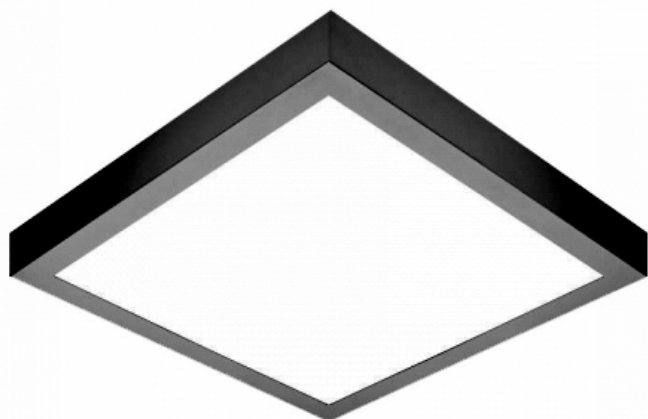


<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP44 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	White / black in standard, other RAL colours on request
<b>Drivers</b>	DALI on request.
<b>Housing material</b>	Steel
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser on request
<b>Temperature range</b>	-20°C ... +25°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
15	3000	1800	>80	230	60 000	IP44	310x310x68	497575
15	4000	1850	>80	230	60 000	IP44	310x310x68	497582
19	3000	2100	>80	230	60 000	IP44	480x480x68	497612
19	4000	2200	>80	230	60 000	IP44	480x480x68	497626
34	3000	4050	>80	230	60 000	IP44	620x620x68	497698
34	4000	4250	>80	230	60 000	IP44	620x620x68	497704

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	<b>IP44</b>	IP65
	IP20	<b>IP44</b>	IP65
	IP20	<b>IP44</b>	IP65



# ARTO N

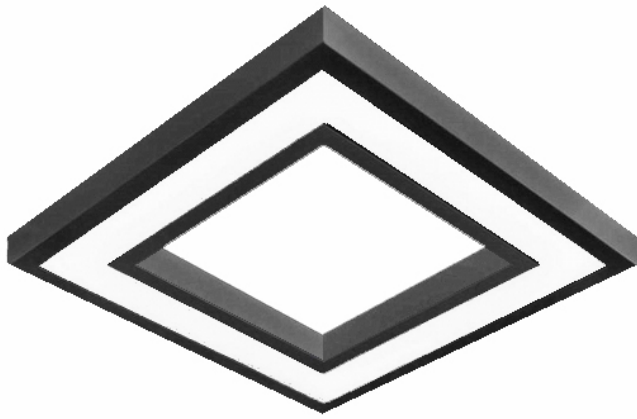

<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP44 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	White / black in standard, other RAL colours on request
<b>Drivers</b>	DALI on request
<b>Housing material</b>	Steel
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser on request
<b>Temperature range</b>	-20°C ... +25°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
28	3000	2400	>80	230	50 000	IP44	675x675x80	020810

Mounting type			
Distribution direction			
IP Code	IP20	<b>IP44</b>	IP65
	IP20	<b>IP44</b>	IP65
	IP20	<b>IP44</b>	IP65





# COMPACT P



<b>Mounting type</b>	Recessed
<b>Light color</b>	White
<b>Color temperature</b>	4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP20 in standard / IP65 on request
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	N/A
<b>Drivers</b>	DALI on request
<b>Housing material</b>	Plastic
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser on request
<b>Temperature range</b>	-20°C ... +25°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
32	4000	3800	>80	230	72 000	IP20	595x595x71	631276
60	4000	6750	>80	230	72 000	IP20	595x595x71	631238

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP44	IP65
	IP20	IP44	IP65
	IP20	IP44	IP65



# RONDO 90



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP40 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	White / black in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Steel
<b>Diffuser material</b>	OPAL diffuser in standard
<b>Temperature range</b>	-10°C ... +50°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
8	3000	560	>90	230	50 000	IP40	Ø90x65	022901
8	4000	560	>90	230	50 000	IP40	Ø90x65	022241
8	6000	560	>90	230	50 000	IP40	Ø90x65	022907

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	<b>IP40</b>	IP65















# RONDO F95




<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP40 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	White / black in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Steel
<b>Diffuser material</b>	OPAL diffuser in standard
<b>Temperature range</b>	-10°C ... +50°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
16	3000	1120	>90	230	50 000	IP40	Ø95x100	028158
16	4000	1120	>90	230	50 000	IP40	Ø95x100	028157

<b>Mounting type</b>			
			
			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	<b>IP40</b>	IP65





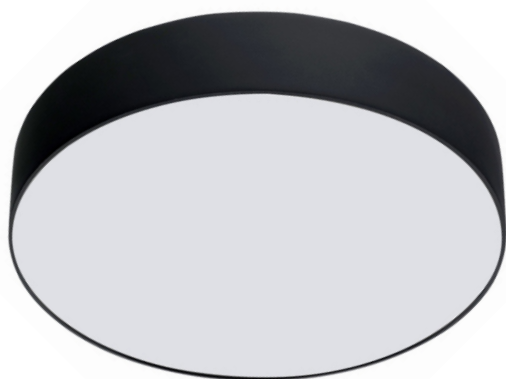









# RONDO 250



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP40 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	White / black in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Steel
<b>Diffuser material</b>	OPAL diffuser in standard
<b>Temperature range</b>	-10°C ... +50°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
30	3000	560	>80	230	50 000	IP40	Ø250x43	022906
30	4000	560	>80	230	50 000	IP40	Ø250x43	022240
30	6000	560	>80	230	50 000	IP40	Ø250x43	022912

<b>Mounting type</b>			
			
			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	<b>IP40</b>	IP65














# RONDO F175



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP40 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	White / black in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Steel
<b>Diffuser material</b>	OPAL diffuser in standard
<b>Temperature range</b>	-10°C ... +50°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
16	3000	1280	>90	230	50 000	IP40	Ø175x85	028164
16	4000	1280	>90	230	50 000	IP40	Ø175x85	028162

<b>Mounting type</b>			
			
			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP40	IP65



# FOCUS



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP20 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	White / black in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Steel
<b>Diffuser material</b>	N/A
<b>Temperature range</b>	-10°C ... +50°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
9	3000	810	>80	230	50 000	IP20	Ø90x126	029530
9	4000	810	>80	230	50 000	IP20	Ø90x126	029531
16	3000	1440	>80	230	50 000	IP20	Ø120x126	029533
16	4000	1440	>80	230	50 000	IP20	Ø120x126	028742
30	3000	2700	>80	230	50 000	IP20	Ø140x126	029538
30	4000	2700	>80	230	50 000	IP20	Ø140x126	029537

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP44	IP65
	IP20	IP44	IP65
	IP20	IP44	IP65















# DL R 225



<b>Mounting type</b>	Recessed
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP40 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	White / black in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Steel
<b>Diffuser material</b>	N/A
<b>Temperature range</b>	-10°C ... +50°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
24	3000	2160	>80	230	50 000	IP40	Ø225x30	021444
24	4000	2160	>80	230	50 000	IP40	Ø225x30	021443
24	6000	2160	>80	230	50 000	IP40	Ø225x30	021442

<b>Mounting type</b>			
			
			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	<b>IP40</b>	IP65



# DL SQ 225



<b>Mounting type</b>	Recessed
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP40 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	White / black in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Steel
<b>Diffuser material</b>	N/A
<b>Temperature range</b>	-10°C ... +50°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
21	3000	1680	>80	230	50 000	IP40	Ø225x30	020137
21	4000	1680	>80	230	50 000	IP40	Ø225x30	020136
21	6000	1680	>80	230	50 000	IP40	Ø225x30	020135

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	<b>IP40</b>	IP65
	IP20	<b>IP40</b>	IP65
	IP20	<b>IP40</b>	IP65





# LUMOS



<b>Mounting type</b>	Recessed
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP20 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	White / black in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Steel
<b>Diffuser material</b>	N/A
<b>Temperature range</b>	-10°C ... +50°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
9	3000	600	>80	230	50 000	IP20	Ø62x91x95	024285
9	4000	600	>80	230	50 000	IP20	Ø62x91x95	023736
9	3000	600	>80	230	50 000	IP20	Ø62x91x95	024286

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP40	IP65















# KARDAN



<b>Mounting type</b>	Recessed
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP20 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	White / black in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Steel
<b>Diffuser material</b>	N/A
<b>Temperature range</b>	-10°C ... +50°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
9	3000	680	>80	230	50 000	IP20	102x102x85	024126
9	4000	680	>80	230	50 000	IP20	102x102x85	024125
9	6000	680	>80	230	50 000	IP20	102x102x85	024124

<b>Mounting type</b>			
			
			
<b>Distribution direction</b>			
<b>IP Code</b>	<b>IP20</b>	<b>IP40</b>	<b>IP65</b>



# SIMPLE



<b>Mounting type</b>	Recessed
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP20 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	White / black in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Steel
<b>Diffuser material</b>	N/A
<b>Temperature range</b>	-10°C ... +50°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
2x 9	3000	1260	>80	230	50 000	IP20	148x80x90	026876
2x 9	4000	1260	>80	230	50 000	IP20	148x80x90	028150

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP40	IP65
	IP20	IP40	IP65
	IP20	IP40	IP65





# WALL LUMINAIRES



WALL SQ	30
CASE SQ	31
WALL LINEAR	32
BARIS	33
WALL SPOT	34
AQUA SQ	35
AQUA	36

# WALL SQ



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	2700K / 3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP20 in standard / IP44 on request
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Standard Gray RAL 9006, other RAL colours on request
<b>Drivers</b>	Electronic driver in standard, DALI on request
<b>Housing material</b>	Steel
<b>Diffuser material</b>	Microprismatic diffuser
<b>Temperature range</b>	0°C ... +40°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
10	2700	800	>80	230	50 000	IP20	100x100x128	4415.800/827
10	3000	800	>80	230	50 000	IP20	100x100x128	4415.800/830
10	4000	800	>80	230	50 000	IP20	100x100x128	4415.800/840

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>






# CASE SQ




<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP44 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Standard Gray RAL 9006, other RAL colours on request
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Steel
<b>Diffuser material</b>	Frosted diffuser in standard
<b>Temperature range</b>	0°C ... +40°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
9	3000	1300	>80	230	50 000	IP44	100x100x128	5114.1300/830
9	4000	1300	>80	230	50 000	IP44	100x100x128	5114.1300/840

<b>Mounting type</b>			
			
			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	<b>IP44</b>	IP65




# WALL LINEAR

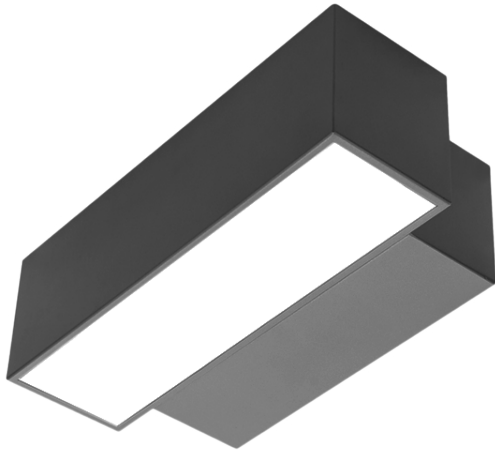

<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP44 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Standard Gray RAL 9006, other RAL colours on request
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Steel
<b>Diffuser material</b>	Frosted diffuser in standard
<b>Temperature range</b>	0°C ... +40°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
16	3000	2200	>80	230	50 000	IP44	300x110x171	2948.2200/830
16	4000	2200	>80	230	50 000	IP44	300x110x171	2948.2200/840

<b>Mounting type</b>			
			
			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	<b>IP44</b>	IP65











# BARIS



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP44 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	White / black in standard
<b>Drivers</b>	Electronic driver in standard, DALI on request
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser on request
<b>Temperature range</b>	-10°C ... +50°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
16	3000	1300	>80	230	65 000	IP44	580x55x70	318979
16	4000	1400	>80	230	65 000	IP44	580x55x70	318962
16	3000	1600	>80	230	65 000	IP44	580x55x70	455445
16	4000	1700	>80	230	65 000	IP44	580x55x70	455476

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	<b>IP44</b>	IP65



# WALL SPOT



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP20 in standard / IP44 on request
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Standard Gray RAL 9006, other RAL colours on request
<b>Drivers</b>	Electronic driver in standard, DALI on request
<b>Housing material</b>	Steel
<b>Diffuser material</b>	Oslona transparentna in standard. OPAL diffuser On request
<b>Temperature range</b>	0°C ... +40°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
9	3000	1100	>80	230	50 000	IP20	Ø120x222	3496.1100/830
9	4000	1100	>80	230	50 000	IP20	Ø120x222	3496.1100/840
9	3000	2400	>80	230	50 000	IP20	Ø120x222	3496.2400/830
9	4000	2400	>80	230	50 000	IP20	Ø120x222	3496.2400/840
9	3000	3200	>80	230	50 000	IP20	Ø120x222	3496.3200/830
9	4000	3200	>80	230	50 000	IP20	Ø120x222	3496.3200/840

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP44	IP65



# AQUA SQ



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP65 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	White / black in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Steel
<b>Diffuser material</b>	Microprismatic diffuser in standard
<b>Temperature range</b>	-10°C ... +50°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
3	3000	121	>80	230	50 000	IP65	70x70x97	025738

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP40	IP65
	IP20	IP40	IP65
	IP20	IP40	IP65



# AQUA



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP65 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	White / black in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Steel
<b>Diffuser material</b>	Microprismatic diffuser in standard
<b>Temperature range</b>	-10°C ... +50°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
3	3000	121	>80	230	50 000	IP65	Ø175x97	025737

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP40	IP65
	IP20	IP40	IP65
	IP20	IP40	IP65





# LINEAR LUMINAIRES










SLIM	40
RAY	41
LIN	42
LIN-T	43
LIN-45	44
IDEO LOW	45
IDEO	46
INSO	47
INDILEDADA	48
IDEO IN	49
SPACE	50
<b>LED TAPES</b>	<b>51</b>

# SLIM



<b>Mounting type</b>	Surface / Recessed / Suspended / Furniture
<b>Light color</b>	White in standard. RGB / RGBW / RGBW DMX on request
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>Voltage</b>	12V / 24V
<b>IP Code</b>	IP20 in standard / IP65 on request
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Raw aluminium in standard. Anode / powder coating on request
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser / frosted / black / transparent diffuser on request
<b>Assembly</b>	Screws / brackets / mounting tape
<b>Temperature range</b>	-30°C ... +45°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
19,2	3000	980	>85	12	50 000	IP20	16x8,5x2000	SLIM-Su-Op-12-3000-2m
19,2	4000	980	>85	12	50 000	IP20	16x8,5x2000	SLIM-Su-Op-12-4000-2m
19,2	6000	980	>85	12	50 000	IP20	16x8,5x2000	SLIM-Su-Op-12-5000-2m
19,2	3000	980	>85	24	50 000	IP20	16x8,5x2000	SLIM-Su-Op-24-3000-2m
19,2	4000	980	>85	24	50 000	IP20	16x8,5x2000	SLIM-Su-Op-24-4000-2m
19,2	6000	980	>85	24	50 000	IP20	16x8,5x2000	SLIM-Su-Op-24-5000-2m

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>			





<b>Mounting type</b>	Surface / Recessed / Suspended / Furniture
<b>Light color</b>	White in standard. RGB / RGBW / RGBW DMX on request
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>Voltage</b>	12V / 24V
<b>IP Code</b>	IP20 in standard / IP65 on request
<b>Movement sensor</b>	On request.
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Raw aluminium in standard. Anode / powder coating on request
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser / frosted / black / transparent diffuser on request
<b>Assembly</b>	Screws / brackets / mounting tape
<b>Temperature range</b>	-30°C ... +45°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
19,2	3000	980	>85	12	50 000	IP20	10x7x2000	RAY-Su-Op-12-3000-2m
19,2	4000	980	>85	12	50 000	IP20	10x7x2000	RAY-Su-Op-12-4000-2m
19,2	6000	980	>85	12	50 000	IP20	10x7x2000	RAY-Su-Op-12-5000-2m
19,2	3000	980	>85	24	50 000	IP20	10x7x2000	RAY-Su-Op-24-3000-2m
19,2	4000	980	>85	24	50 000	IP20	10x7x2000	RAY-Su-Op-24-4000-2m
19,2	6000	980	>85	24	50 000	IP20	10x7x2000	RAY-Su-Op-24-5000-2m

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
















<b>Mounting type</b>	Surface / Recessed / Suspended / Furniture
<b>Light color</b>	White in standard. RGB / RGBW / RGBW DMX on request
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>Voltage</b>	12V / 24V
<b>IP Code</b>	IP20 in standard / IP65 on request
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Raw aluminium in standard. Anode / powder coating on request.
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser / frosted / black / transparent diffuser on request
<b>Assembly</b>	Screws / brackets / mounting tape
<b>Temperature range</b>	-30°C ... +45°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
19,2	3000	980	>85	12	50 000	IP20	16x13,5x2000	LIN-Su-Op-12-3000-2m
19,2	4000	980	>85	12	50 000	IP20	16x13,5x2000	LIN-Su-Op-12-4000-2m
19,2	6000	980	>85	12	50 000	IP20	16x13,5x2000	LIN-Su-Op-12-5000-2m
19,2	3000	980	>85	24	50 000	IP20	16x13,5x2000	LIN-Su-Op-24-3000-2m
19,2	4000	980	>85	24	50 000	IP20	16x13,5x2000	LIN-Su-Op-24-4000-2m
19,2	6000	980	>85	24	50 000	IP20	16x13,5x2000	LIN-Su-Op-24-5000-2m

<b>Mounting type</b>			
			
	<b>Distribution direction</b>		
<b>IP Code</b>			
	IP20	IP44	IP65





<b>Mounting type</b>	Recessed / Furniture
<b>Light color</b>	White in standard. RGB / RGBW / RGBW DMX on request
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>Voltage</b>	12V / 24V
<b>IP Code</b>	IP20 in standard / IP65 on request
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Raw aluminium in standard. Anode / powder coating on request
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser / frosted / black / transparent diffuser on request.
<b>Assembly</b>	Screws / brackets / mounting tape
<b>Temperature range</b>	-30°C ... +45°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
19,2	3000	980	>85	12	50 000	IP20	21,9x13,5x2000	LINT-Su-Op-12-3000-2m
19,2	4000	980	>85	12	50 000	IP20	21,9x13,5x2000	LINT-Su-Op-12-4000-2m
19,2	6000	980	>85	12	50 000	IP20	21,9x13,5x2000	LINT-Su-Op-12-5000-2m
19,2	3000	980	>85	24	50 000	IP20	21,9x13,5x2000	LINT-Su-Op-24-3000-2m
19,2	4000	980	>85	24	50 000	IP20	21,9x13,5x2000	LINT-Su-Op-24-4000-2m
19,2	6000	980	>85	24	50 000	IP20	21,9x13,5x2000	LINT-Su-Op-24-5000-2m

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>



# LIN-45



<b>Mounting type</b>	Surface / Suspended / Furniture
<b>Light color</b>	White in standard. RGB / RGBW / RGBW DMX on request
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>Voltage</b>	12V / 24V
<b>IP Code</b>	IP20 in standard / IP65 on request
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Raw aluminium in standard. Anode / powder coating on request
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser / frosted / black / transparent diffuser on request
<b>Assembly</b>	Screws / brackets / mounting tape
<b>Temperature range</b>	-30°C ... +45°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
19,2	3000	980	>85	12	50 000	IP20	27x14,3x2000	LIN45-Su-Op-12-3000-2m
19,2	4000	980	>85	12	50 000	IP20	27x14,3x2000	LIN45-Su-Op-12-4000-2m
19,2	6000	980	>85	12	50 000	IP20	27x14,3x2000	LIN45-Su-Op-12-5000-2m
19,2	3000	980	>85	24	50 000	IP20	27x14,3x2000	LIN45-Su-Op-24-3000-2m
19,2	4000	980	>85	24	50 000	IP20	27x14,3x2000	LIN45-Su-Op-24-4000-2m
19,2	6000	980	>85	24	50 000	IP20	27x14,3x2000	LIN45-Su-Op-24-5000-2m

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>



# IDEO LOW



<b>Mounting type</b>	Surface / Suspended
<b>Light color</b>	White in standard. RGB / RGBW / RGBW DMX on request
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>Voltage</b>	12V / 24V
<b>IP Code</b>	IP20 in standard / IP65 on request
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Raw aluminium in standard. Anode / powder coating on request
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser / frosted / black / transparent diffuser on request
<b>Assembly</b>	Screws / brackets / mounting tape
<b>Temperature range</b>	-30°C ... +45°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
57,6	3000	2950	>85	12	50 000	IP20	34x13,5x2000	IDEOLOW-Su-Op-12-3000-2m
57,6	4000	2950	>85	12	50 000	IP20	34x13,5x2000	IDEOLOW-Su-Op-12-4000-2m
57,6	6000	2950	>85	12	50 000	IP20	34x13,5x2000	IDEOLOW-Su-Op-12-5000-2m
57,6	3000	2950	>85	24	50 000	IP20	34x13,5x2000	IDEOLOW-Su-Op-24-3000-2m
57,6	4000	2950	>85	24	50 000	IP20	34x13,5x2000	IDEOLOW-Su-Op-24-4000-2m
57,6	6000	2950	>85	24	50 000	IP20	34x13,5x2000	IDEOLOW-Su-Op-24-5000-2m

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>





<b>Mounting type</b>	Surface / Suspended
<b>Light color</b>	White in standard. RGB / RGBW / RGBW DMX on request
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>Voltage</b>	12V / 24V
<b>IP Code</b>	IP20 in standard / IP65 on request
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Raw aluminium in standard. Anode / powder coating on request
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser / frosted / black / transparent diffuser on request
<b>Assembly</b>	Screws / brackets / mounting tape
<b>Temperature range</b>	-30°C ... +45°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
57,6	3000	2950	>85	12	50 000	IP20	34x25,5x2000	IDEO-Su-Op-12-3000-2m
57,6	4000	2950	>85	12	50 000	IP20	34x25,5x2000	IDEO-Su-Op-12-4000-2m
57,6	6000	2950	>85	12	50 000	IP20	34x25,5x2000	IDEO-Su-Op-12-5000-2m
57,6	3000	2950	>85	24	50 000	IP20	34x25,5x2000	IDEO-Su-Op-24-3000-2m
57,6	4000	2950	>85	24	50 000	IP20	34x25,5x2000	IDEO-Su-Op-24-4000-2m
57,6	6000	2950	>85	24	50 000	IP20	34x25,5x2000	IDEO-Su-Op-24-5000-2m

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>






<b>Mounting type</b>	Recessed
<b>Light color</b>	White in standard. RGB / RGBW / RGBW DMX on request
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>Voltage</b>	12V / 24V
<b>IP Code</b>	IP20 in standard / IP65 on request
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Raw aluminium in standard. Anode / powder coating on request
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser / frosted / black / transparent diffuser on request
<b>Assembly</b>	Screws
<b>Temperature range</b>	-30°C ... +45°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
57,6	3000	2950	>85	12	50 000	IP20	51x30x2000	INSO-Su-Op-12-3000-2m
57,6	4000	2950	>85	12	50 000	IP20	51x30x2000	INSO-Su-Op-12-4000-2m
57,6	6000	2950	>85	12	50 000	IP20	51x30x2000	INSO-Su-Op-12-5000-2m
57,6	3000	2950	>85	24	50 000	IP20	51x30x2000	INSO-Su-Op-24-3000-2m
57,6	4000	2950	>85	24	50 000	IP20	51x30x2000	INSO-Su-Op-24-4000-2m
57,6	6000	2950	>85	24	50 000	IP20	51x30x2000	INSO-Su-Op-24-5000-2m

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>



# INDILEDA

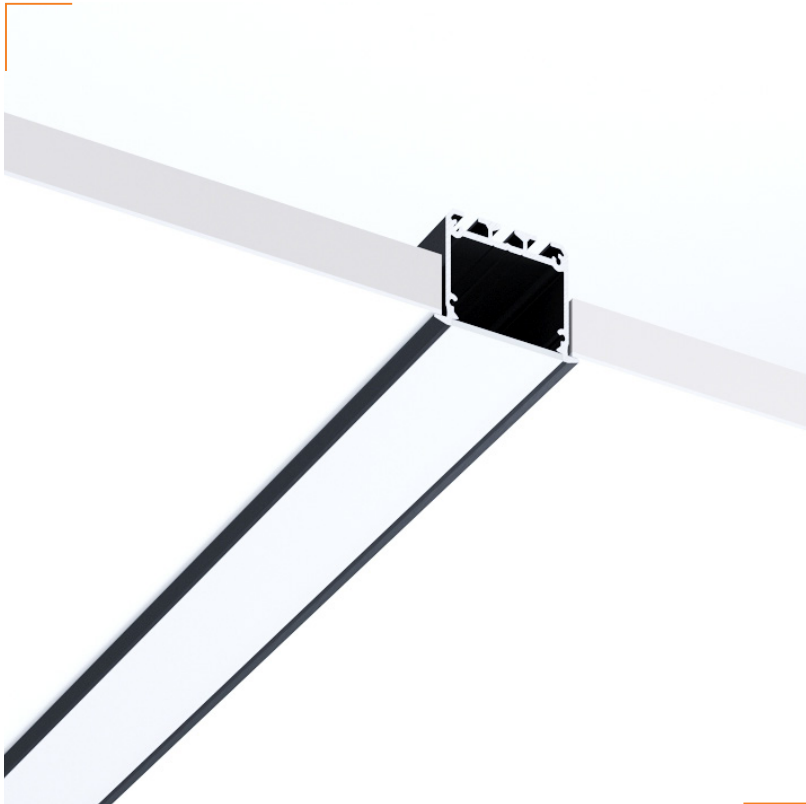


<b>Mounting type</b>	Recessed
<b>Light color</b>	White in standard. RGB / RGBW / RGBW DMX on request
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>Voltage</b>	12V / 24V
<b>IP Code</b>	IP20 in standard / IP65 on request
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Raw aluminium in standard. Anode / powder coating on request
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser / frosted / black / transparent diffuser on request
<b>Assembly</b>	Screws / brackets / mounting tape
<b>Temperature range</b>	-30°C ... +45°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
38,4	3000	1970	>85	12	50 000	IP20	38,4x26,1x2000	IDILEDA-Su-Op-12-3000-2m
38,4	4000	1970	>85	12	50 000	IP20	38,4x26,1x2000	IDILEDA-Su-Op-12-4000-2m
38,4	6000	1970	>85	12	50 000	IP20	38,4x26,1x2000	IDILEDA-Su-Op-12-5000-2m
38,4	3000	1970	>85	24	50 000	IP20	38,4x26,1x2000	IDILEDA-Su-Op-24-3000-2m
38,4	4000	1970	>85	24	50 000	IP20	38,4x26,1x2000	IDILEDA-Su-Op-24-4000-2m
38,4	6000	1970	>85	24	50 000	IP20	38,4x26,1x2000	IDILEDA-Su-Op-24-5000-2m

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>



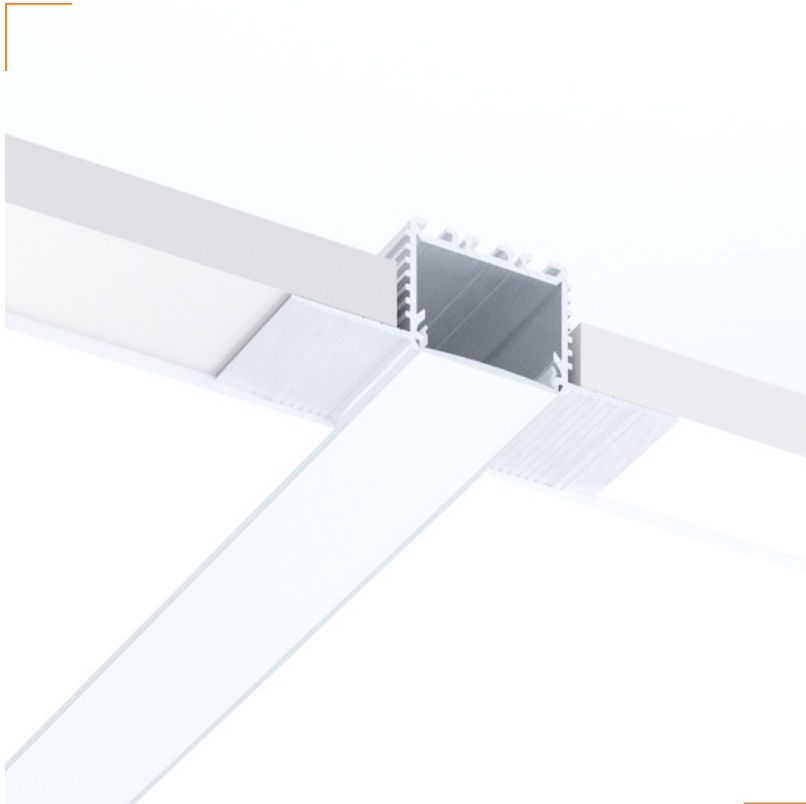

<b>Mounting type</b>	Recessed
<b>Light color</b>	White in standard. RGB / RGBW / RGBW DMX on request
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>Voltage</b>	12V / 24V
<b>IP Code</b>	IP20 in standard / IP65 on request
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Raw aluminium in standard. Anode / powder coating on request
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser / frosted / black / transparent diffuser on request.
<b>Assembly</b>	Screws / brackets / mounting tape
<b>Temperature range</b>	-30°C ... +45°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
57,6	3000	2950	>85	12	50 000	IP20	33,4(83,4)x24,5x2000	IDEOIN-Su-Op-12-3000-2m
57,6	4000	2950	>85	12	50 000	IP20	33,4(83,4)x24,5x2000	IDEOIN-Su-Op-12-4000-2m
57,6	6000	2950	>85	12	50 000	IP20	33,4(83,4)x24,5x2000	IDEOIN-Su-Op-12-5000-2m
57,6	3000	2950	>85	24	50 000	IP20	33,4(83,4)x24,5x2000	IDEOIN-Su-Op-24-3000-2m
57,6	4000	2950	>85	24	50 000	IP20	33,4(83,4)x24,5x2000	IDEOIN-Su-Op-24-4000-2m
57,6	6000	2950	>85	24	50 000	IP20	33,4(83,4)x24,5x2000	IDEOIN-Su-Op-24-5000-2m

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>





# SPACE



<b>Mounting type</b>	Recessed / Suspended
<b>Light color</b>	White in standard. RGB / RGBW / RGBW DMX on request
<b>Color temperature</b>	3000K / 4000K / 6000K
<b>Voltage</b>	12V / 24V
<b>IP Code</b>	IP20 in standard / IP65 on request
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Surowe aluminium in standard. Anodowanie / malowanie proszkowe On request
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard. Microprismatic diffuser / frosted / black / transparent diffuser on request
<b>Assembly</b>	Screws / brackets / mounting tape
<b>Temperature range</b>	-30°C ... +45°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
76,8	3000	3935	>85	12	50 000	IP20	34x13,5x2000	SPACE-Su-Op-12-3000-2m
76,8	4000	3935	>85	12	50 000	IP20	34x13,5x2000	SPACE-Su-Op-12-4000-2m
76,8	6000	3935	>85	12	50 000	IP20	34x13,5x2000	SPACE-Su-Op-12-5000-2m
76,8	3000	3935	>85	24	50 000	IP20	34x13,5x2000	SPACE-Su-Op-24-3000-2m
76,8	4000	3935	>85	24	50 000	IP20	34x13,5x2000	SPACE-Su-Op-24-4000-2m
76,8	6000	3935	>85	24	50 000	IP20	34x13,5x2000	SPACE-Su-Op-24-5000-2m

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP44	IP65
	IP20	IP44	IP65
	IP20	IP44	IP65



# LED TAPES



We represent the Arlight group, an international consortium that has been investing in the latest LED technologies for years. In 2017 Arlight opened a factory for light sources and LED tapes in Europe. This investment makes Arlight a key partner in the global market of modern lighting. The portfolio includes over 2,000 products with over 250 types of LED tapes. All products are being tested in the laboratory and in certified research institutes. Arlight is a reliable supplier of products with the highest quality and long-term warranty. Thanks to its resources the company can successfully accomplish all the investments.

<b>Mounting type</b>	LED Extrusions
<b>Light color</b>	White / RGB / RGBW / RGBW DMX
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	12V / 24V
<b>IP Code</b>	IP20 / IP67
<b>Controller</b>	DALI / DMX
<b>Assembly</b>	Mounting tape in standard
<b>Temperature range</b>	-30°C ... +45°C
<b>Warranty</b>	3 years

moc [W/m]	light color	color temperature [K]	lumen output [lm/m]	CRI Ra	input voltage [V]	IP code	dimensions [mm]	DALI DMX	product code
7,2	white	4000	760	>85	24	IP20	8x2x5000	tak	020012(B)
9,6	white	3000	820	>85	24	IP20	8x2x5000	tak	024108(B)
9,6	white	3000	820	>85	24	IP67	8x2x5000	tak	024108(B) ip67
9,6	white	4000	820	>85	24	IP20	8x2x5000	tak	011581(B)
9,6	white	4000	820	>85	24	IP67	8x2x5000	tak	011581(B) ip67
14,4	white	4000	1300	>85	24	IP20	8x2x5000	tak	011571(B)
14,4	white	4000	1300	>85	24	IP67	8x2x5000	tak	011571(B) ip67
19,2	white	4000	1640	>85	24	IP20	10x2x5000	tak	017431
14,4	RGBW	4000	900	>85	24	IP20	10x2x5000	tak	018326
14,4	RGB DMX	nd.	nd.	>85	24	IP20	12x2x5000	tak	029435
22,4	RGB	nd.	nd.	>85	24	IP20	10x3x5000	tak	022718





# TECHNICAL LUMINAIRES

FORTIMO	54
PROFI 60	55
BAR	56
TYTAN 2	57
MIMO 2	58

# FORTIMO



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP54 in standard
<b>Emergency unit</b>	On request: standard / DALI-3h
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Gray RAL9006 in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	Microprismatic diffuser in standard. Frosted / OPAL on request
<b>Temperature range</b>	-20°C ... +40°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
29	3000	4400	>80	230	50 000	IP54	120x68x1200	3281.4400/830
29	4000	4400	>80	230	50 000	IP54	120x68x1200	3281.4400/840
36	3000	5500	>80	230	50 000	IP54	120x68x1500	3281.5500/830
36	4000	5500	>80	230	50 000	IP54	120x68x1500	3281.5500/840

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP44	<b>IP54</b>	IP65
	IP44	<b>IP54</b>	IP65
	IP44	<b>IP54</b>	IP65



# PROFI 60



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP54 in standard
<b>Emergency unit</b>	On request: standard / DALI-3h
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Gray RAL9006 in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	Microprismatic diffuser in standard. Frosted / OPAL on request
<b>Temperature range</b>	-20°C ... +40°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
15	3000	2200	>80	230	50 000	IP54	61x103x587	5845.2200/830
15	4000	2200	>80	230	50 000	IP54	61x103x587	5845.2200/840
22	3000	3300	>80	230	50 000	IP54	61x103x868	5845.3300/830
22	4000	3300	>80	230	50 000	IP54	61x103x868	5845.3300/840
29	3000	4400	>80	230	50 000	IP54	61x103x1149	5845.4400/830
29	4000	4400	>80	230	50 000	IP54	61x103x1149	5845.4400/840
36	3000	5500	>80	230	50 000	IP54	61x103x1430	5845.5500/830
36	4000	5500	>80	230	50 000	IP54	61x103x1430	5845.5500/840

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP44	<b>IP54</b>	IP65



# BAR



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP65 in standard
<b>Emergency unit</b>	On request: standard / DALI-3h
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	On request
<b>Housing color</b>	Gray RAL9006 in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	Microprismatic diffuser in standard. Frosted / OPAL on request
<b>Temperature range</b>	-20°C ... +40°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
38	3000	4000	>80	230	50 000	IP65	100x77x1200	6220.4000/830
38	4000	4000	>80	230	50 000	IP65	100x77x1200	6220.4000/840
60	3000	6000	>80	230	50 000	IP65	100x77x1200	6220.6000/830
60	4000	6000	>80	230	50 000	IP65	100x77x1200	6220.6000/840

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP44	IP54	IP65
	IP44	IP54	IP65
	IP44	IP54	IP65



# TYTAN 2



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP66 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Gray RAL9006 in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Plastic
<b>Diffuser material</b>	Microprismatic diffuser in standard. Frosted on request
<b>Temperature range</b>	-20°C ... +35°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
28	3000	4150	>80	230	70 000	IP66	85x80x1150	941528
28	4000	4550	>80	230	70 000	IP66	85x80x1150	941061
55	3000	8400	>80	230	70 000	IP66	85x80x1150	941641
55	4000	9050	>80	230	70 000	IP66	85x80x1150	941184
69	3000	10500	>80	230	70 000	IP66	85x80x1450	941702
69	4000	11300	>80	230	70 000	IP66	85x80x1450	941238

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP44	<b>IP56</b>	IP65
	IP44	<b>IP56</b>	IP65
	IP44	<b>IP56</b>	IP65











# MIMO 2



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP66 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Gray RAL9006 in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Plastic
<b>Diffuser material</b>	OPAL diffuser in standard
<b>Temperature range</b>	-20°C ... +35°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
23	3000	3350	>80	230	50 000	IP66	45x50x1250	100819
23	4000	3600	>80	230	50 000	IP66	45x50x1250	100888
30	3000	4650	>80	230	50 000	IP66	45x50x1510	100826
30	4000	5000	>80	230	50 000	IP66	45x50x1510	100895

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP44	<b>IP56</b>	IP65





# EVACUATION LUMINAIRES

## EMERGENCY

ONTEC D	62
ONTEC C	63
DOT CR	64
DOT CS	65
ARROW ARNS	66
ARROW ARPS	67
ARROW ARN	68
ARROW ARP	69
ONTEC S C1	70
EXIT S	71

## ROUTE DIRECTION



















ONTEC S M1	72
ONTEC E	73
INFINITY II B	74
INFINITY II AL	75
ONTEC G	76
INFINITY II AW	77
ONTEC R	78

# ONTEC D



<b>Mounting type</b>	Recessed
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP20 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test DATA - addressable module CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Cd
<b>Housing material</b>	Plastic
<b>Temperature range</b>	+10°C ... +35°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
3,9	3	140	ST	230	IK03	IP20	90x90x13	TM-OD.M1.ST004
3,9	3	140	AT	230	IK03	IP20	90x90x13	TM-OD.M1.AT006
3,9	3	140	DATA	230	IK03	IP20	90x90x13	TM-OD.M1.DT002
3,9	-	140	CB	230	IK03	IP20	90x90x13	TM-OD.M1.CB001

<b>Mounting type</b>			
			
			
<b>Distribution direction</b>			
			
			
<b>IP Code</b>	IP20	IP44	IP65
	M	NM	AT
	M	NM	AT



# ONTEC D



<b>Mounting type</b>	Recessed
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP20 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test DATA - addressable module CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Cd
<b>Housing material</b>	Plastic
<b>Temperature range</b>	+10°C ... +35°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
3,9	3	140	ST	230	IK03	IP20	Ø90x13	TM-OC.M1.ST003
3,9	3	140	AT	230	IK03	IP20	Ø90x13	TM-OC.M1.AT005
3,9	3	140	DATA	230	IK03	IP20	Ø90x13	TM-OC.M1.DT003
3,9	-	140	CB	230	IK03	IP20	Ø90x13	TM-OC.M1.CB001

Mounting type			
Distribution direction			
IP Code	IP20	IP44	IP65
	IP20	IP44	IP65
	IP20	IP44	IP65
Version	M	NM	AT
	M	NM	AT
	M	NM	AT



# DOT CR



<b>Mounting type</b>	Recessed
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP20 / IP65 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test DATA - addressable module CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Mh
<b>Housing material</b>	Plastic
<b>Temperature range</b>	+10°C ... +35°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
2	3	250	AT	230	IK03	IP20	Ø130x30	550690
2	3	250	DATA	230	IK03	IP20	Ø130x30	550676
2	-	250	CB	230	IK03	IP20	Ø130x30	550713

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP44	IP65
	IP20	IP44	IP65
	IP20	IP44	IP65
<b>Version</b>	M	NM	AT
	M	NM	AT
	M	NM	AT



# DOT CS



<b>Mounting type</b>	Surface
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP20 / IP65 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test DATA - addressable module CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Mh
<b>Housing material</b>	Plastic
<b>Temperature range</b>	+10°C ... +35°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
2	3	250	AT	230	IK03	IP20	Ø130x30	550157
2	3	250	DATA	230	IK03	IP20	Ø130x30	550133
2	-	250	CB	230	IK03	IP20	Ø130x30	550171

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
	<b>IP20</b>	<b>IP44</b>	<b>IP65</b>
<b>Version</b>	<b>M</b>	<b>NM</b>	<b>AT</b>
	<b>M</b>	<b>NM</b>	<b>AT</b>
	<b>M</b>	<b>NM</b>	<b>AT</b>



# ARROW ARNS



<b>Mounting type</b>	Surface / Suspended
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP40 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test FZLV - central battery CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Cd
<b>Housing material</b>	Plastic
<b>Temperature range</b>	0°C ... +40°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
1	3	110	ST	230	IK03	IP40	76x43x299	ARNS/1W/E/3/ST
1	3	110	AT	230	IK03	IP40	76x43x299	ARNS/1W/E/3/AT
1	3	110	FZLV	24	IK03	IP40	76x43x299	ARNS/1W/E/3/FZLV
1	-	110	CB	230	IK03	IP40	76x43x299	ARNS/1W/E/3/CB

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP40	IP65
	IP20	IP40	IP65
	IP20	IP40	IP65
<b>Version</b>	M	NM	AT
	M	NM	AT
	M	NM	AT





# ARROW ARPS



<b>Mounting type</b>	Recessed
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP40 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test FZLV - central battery CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Cd
<b>Housing material</b>	Plastic
<b>Temperature range</b>	0°C ... +40°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
1	3	110	ST	230	IK03	IP40	76x43x299	ARPS/1W/E/3/ST
1	3	110	AT	230	IK03	IP40	76x43x299	ARPS/1W/E/3/AT
1	3	110	FZLV	24	IK03	IP40	76x43x299	ARPS/1W/E/3/FZLV
1	-	110	CB	230	IK03	IP40	76x43x299	ARPS/1W/E/3/CB

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	<b>IP40</b>	IP65
	IP20	<b>IP40</b>	IP65
	IP20	<b>IP40</b>	IP65
<b>Version</b>	M	NM	AT
	M	NM	AT
	M	NM	AT



# ARROW ARN



<b>Mounting type</b>	Surface / Suspended
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP40 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test FZLV - central battery CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Cd
<b>Housing material</b>	Plastic
<b>Temperature range</b>	0°C ... +40°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
1	3	110	ST	230	IK03	IP40	76x43x299	ARN/1W/E/3/ST
1	3	110	AT	230	IK03	IP40	76x43x299	ARN/1W/E/3/AT
1	3	110	FZLV	24	IK03	IP40	76x43x299	ARN/1W/E/3/FZLV
1	-	110	CB	230	IK03	IP40	76x43x299	ARN/1W/E/3/CB

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP40	IP65
	IP20	IP40	IP65
	IP20	IP40	IP65
<b>Version</b>	M	NM	AT
	M	NM	AT
	M	NM	AT















# ARROW ARP



<b>Mounting type</b>	Recessed
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP40 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test FZLV - central battery CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Cd
<b>Housing material</b>	Plastic
<b>Temperature range</b>	0°C ... +40°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
1	3	110	ST	230	IK03	IP40	76x43x299	ARP/1W/E/3/ST
1	3	110	AT	230	IK03	IP40	76x43x299	ARP/1W/E/3/AT
1	3	110	FZLV	24	IK03	IP40	76x43x299	ARP/1W/E/3/FZLV
1	-	110	CB	230	IK03	IP40	76x43x299	ARP/1W/E/3/CB

<b>Mounting type</b>			
			
			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP40	IP65
<b>Version</b>	M	NM	AT



# ONTEC S C1



<b>Mounting type</b>	Surface / Recessed / Suspended
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP65 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test DATA - addressable module CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Cd
<b>Housing material</b>	Plastic
<b>Temperature range</b>	+10°C ... +40°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
2	3	225	ST	230	IK08	IP65	144x40x269	TM-OD.C1.ST029
2	3	225	AT	230	IK08	IP65	144x40x269	TM-OD.C1.AT025
2	3	225	DATA	230	IK08	IP65	144x40x269	TM-OD.C1.DT001
2	-	225	CB	230	IK08	IP65	144x40x269	TM-OD.C1.CB001

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP44	IP65
	IP20	IP44	IP65
	IP20	IP44	IP65
<b>Version</b>	M	NM	AT
	M	NM	AT
	M	NM	AT



# EXIT S



<b>Mounting type</b>	Surface / Recessed / Suspended
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP65 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test DATA - addressable module CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Cd
<b>Housing material</b>	Plastic
<b>Temperature range</b>	+10°C ... +40°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
1	3	125	ST	230	IK08	IP65	125x25x226	ETS/1W/E/3/ST
1	3	125	AT	230	IK08	IP65	125x25x226	ETS/1W/E/3/AT
1	3	125	FLZV	24	IK08	IP65	125x25x226	ETS/1W/E/3/FZLV
1	-	125	CB	230	IK08	IP65	125x25x226	ETS/1W/E/3/CB

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP44	IP65
	IP20	IP44	IP65
	IP20	IP44	IP65
<b>Version</b>	M	NM	AT
	M	NM	AT
	M	NM	AT









# ONTEC S M1



<b>Mounting type</b>	Surface / Recessed / Suspended
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP44 in standard / IP65 On request
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test DATA - addressable module CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Cd
<b>Housing material</b>	Plastic
<b>Temperature range</b>	+10°C ... +40°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
2	3	225	ST	230	IK08	IP44	144x40x269	TM-OS.M1.ST009
2	3	225	AT	230	IK08	IP44	144x40x269	TM-OS.M1.AT006
2	3	225	DATA	230	IK08	IP44	144x40x269	TM-OS.M1.DT001
2	-	225	CB	230	IK08	IP44	144x40x269	TM-OS.M1.CB001

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP44	IP65
<b>Version</b>	M	NM	AT






<b>Mounting type</b>	Surface / Recessed / Suspended
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP20 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test DATA - addressable module CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Cd
<b>Housing material</b>	Plastic
<b>Temperature range</b>	+10°C ... +40°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
2	3	225	ST	230	IK08	IP20	152x32x277	TM-OE.EE.ST002
2	3	225	AT	230	IK08	IP20	152x32x277	TM-OE.EE.AT001
2	3	225	DATA	230	IK08	IP20	152x32x277	TM-OE.EE.DT001
2	-	225	CB	230	IK08	IP20	152x32x277	TM-OE.EE.CB001

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP44	IP65
	IP20	IP44	IP65
	IP20	IP44	IP65
<b>Version</b>	M	NM	AT
	M	NM	AT
	M	NM	AT



# INFINITY II B

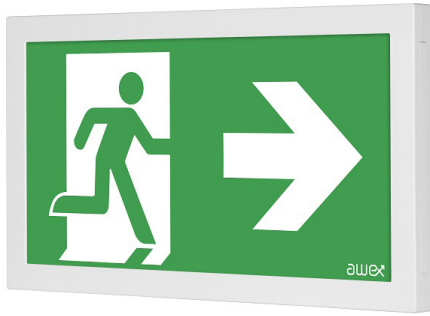

<b>Mounting type</b>	Surface / Recessed
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP40 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test DATA - addressable module CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Cd
<b>Housing material</b>	Plastic
<b>Temperature range</b>	+10°C ... +40°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
1	3	225	ST	230	IK08	IP40	189x51x337	IF2BWS/1W/E/3/ST
1	3	225	AT	230	IK08	IP40	189x51x337	IF2BWS/1W/E/3/AT
1	3	225	FLZV	24	IK08	IP40	189x51x337	IF2BWS/1W/E/3/FZLV
1	-	225	CB	230	IK08	IP40	189x51x337	IF2BWS/1W/E/3/CB

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP40	IP65
	IP20	IP40	IP65
	IP20	IP40	IP65
<b>Version</b>	M	NM	AT
	M	NM	AT
	M	NM	AT





# INFINITY II AL



<b>Mounting type</b>	Podwieszany
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP40 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test DATA - addressable module CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Cd
<b>Housing material</b>	Plastic
<b>Temperature range</b>	+10°C ... +40°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
1	3	225	ST	230	IK08	IP40	189x51x337	IF2ALS/1W/E/3/ST
1	3	225	AT	230	IK08	IP40	189x51x337	IF2ALS/1W/E/3/AT
1	3	225	FLZV	24	IK08	IP40	189x51x337	IF2ALS/1W/E/3/FLZV
1	-	225	CB	230	IK08	IP40	189x51x337	IF2ALS/1W/E/3/CB

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	<b>IP40</b>	IP65
	IP20	<b>IP40</b>	IP65
	IP20	<b>IP40</b>	IP65
<b>Version</b>	M	NM	AT
	M	NM	AT
	M	NM	AT






<b>Mounting type</b>	Surface / Suspended
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP20 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test DATA - addressable module CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Cd
<b>Housing material</b>	Plastic
<b>Temperature range</b>	+10°C ... +40°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
2	3	225	ST	230	IK05	IP20	152x32x277	TM-OG.EE.ST103
2	3	225	AT	230	IK05	IP20	152x32x277	TM-OG.EE.AT102
2	3	225	DATA	230	IK05	IP20	152x32x277	TM-OG.EE.DT102
2	-	225	CB	230	IK05	IP20	152x32x277	TM-OG.EE.CB101

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	IP44	IP65
	IP20	IP44	IP65
	IP20	IP44	IP65
<b>Version</b>	M	NM	AT
	M	NM	AT
	M	NM	AT



# INFINITY II AW

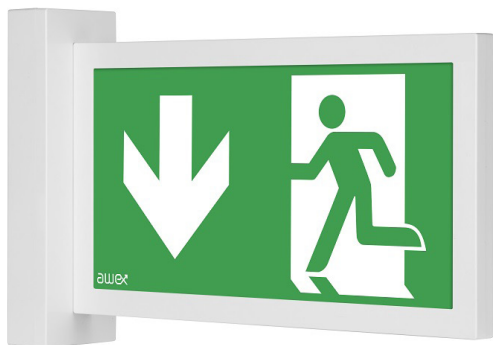

<b>Mounting type</b>	Podwieszany
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP40 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test DATA - addressable module CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Cd
<b>Housing material</b>	Plastic
<b>Temperature range</b>	+10°C ... +40°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
1	3	225	ST	230	IK08	IP40	232x72x377	IF2AWS/1W/E/3/ST
1	3	225	AT	230	IK08	IP40	232x72x377	IF2AWS/1W/E/3/AT
1	3	225	FLZV	24	IK08	IP40	232x72x377	IF2AWS/1W/E/3/FZLV
1	-	225	CB	230	IK08	IP40	232x72x377	IF2AWS/1W/E/3/CB



















<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP20	<b>IP40</b>	IP65
	IP20	<b>IP40</b>	IP65
	IP20	<b>IP40</b>	IP65
<b>Version</b>	M	NM	AT
	M	NM	AT
	M	NM	AT





<b>Mounting type</b>	Surface / Recessed / Suspended
<b>Voltage</b>	210V - 250V
<b>IP Code</b>	IP20 in standard
<b>Emergency unit</b>	ST - for button test AT - auto-test / self-test DATA - addressable module CB - central battery
<b>Housing color</b>	White / black in standard
<b>Insulation class</b>	2
<b>Battery</b>	Ni-Cd
<b>Housing material</b>	Plastic
<b>Temperature range</b>	+10°C ... +35°C
<b>Warranty</b>	5 years
<b>PN-EN standards</b>	PN-EN 60598-1 PN-EN 60598-2-22 PN-EN 61347-1 PN-EN 61347-2-7 PN-EN 61347-2-13 PN-EN 55015 PN-EN 61000-3-2 PN-EN 62031 PN-EN 62471 PN-EN 1838

power [W]	duration time [h]	lumen output [lm]	Emerg. unit	input voltage [V]	IK code	IP code	dimensions [mm]	product code
2	3	125	ST	230	IK03	IP20	130x130x27	TM-OR.E1.ST001
2	3	125	AT	230	IK03	IP20	130x130x27	TM-OR.E1.AT001
2	3	125	DATA	230	IK03	IP20	130x130x27	TM-OR.E1.DT001
2	-	125	CB	230	IK03	IP20	130x130x27	TM-OR.E1.CB001

<b>Mounting type</b>			
			
			
<b>Distribution direction</b>			
			
			
<b>IP Code</b>	IP20	IP44	IP65
	IP20	IP44	IP65
	IP20	IP44	IP65
<b>Version</b>	M	NM	AT
	M	NM	AT
	M	NM	AT





# OUTDOOR LUMINAIRES

PROFI 60	82
FORTIMO	83
FORTIMO R	84
FIB	85
DLN100 U-D	86
KASTEL	87
ART DECK	88
ALT RAY	89
ECRAN	90
FRAME H650	91
LTD LINE	92
LUMILINE	93

# PROFI 60



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP54 in standard
<b>Emergency unit</b>	On request: standard / DALI-3h
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Gray RAL9006 in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	Microprismatic diffuser in standard. Frosted / OPAL on request
<b>Temperature range</b>	-20°C ... +40°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
15	3000	2200	>80	230	50 000	IP54	61x103x587	5845.2200/830
15	4000	2200	>80	230	50 000	IP54	61x103x587	5845.2200/840
22	3000	3300	>80	230	50 000	IP54	61x103x868	5845.3300/830
22	4000	3300	>80	230	50 000	IP54	61x103x868	5845.3300/840
29	3000	4400	>80	230	50 000	IP54	61x103x1149	5845.4400/830
29	4000	4400	>80	230	50 000	IP54	61x103x1149	5845.4400/840
36	3000	5500	>80	230	50 000	IP54	61x103x1430	5845.5500/830
36	4000	5500	>80	230	50 000	IP54	61x103x1430	5845.5500/840

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP44	<b>IP54</b>	IP65
	IP44	<b>IP54</b>	IP65
	IP44	<b>IP54</b>	IP65









# FORTIMO



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP54 in standard
<b>Emergency unit</b>	On request: standard / DALI-3h
<b>Movement sensor</b>	On request
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Gray RAL9006 in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	Microprismatic diffuser in standard. Frosted / OPAL on request
<b>Temperature range</b>	-20°C ... +40°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
29	3000	4400	>80	230	50 000	IP54	120x68x1200	3281.4400/830
29	4000	4400	>80	230	50 000	IP54	120x68x1200	3281.4400/840
36	3000	5500	>80	230	50 000	IP54	120x68x1500	3281.5500/830
36	4000	5500	>80	230	50 000	IP54	120x68x1500	3281.5500/840

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP44	<b>IP54</b>	IP65





# FORTIMO R



<b>Mounting type</b>	Recessed / Suspended
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP54 in standard
<b>Emergency unit</b>	On request
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Gray RAL9006 in standard
<b>Drivers</b>	On request
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	Microprismatic diffuser in standard. Frosted / OPAL on request
<b>Temperature range</b>	-20°C ... +40°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
29	3000	4400	>80	230	50 000	IP54	131x62x1216	5722.4400/830
29	4000	4400	>80	230	50 000	IP54	131x62x1216	5722.4400/840
36	3000	5500	>80	230	50 000	IP54	131x62x1500	5722.5500/830
36	4000	5500	>80	230	50 000	IP54	131x62x1500	5722.5500/840

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP44	IP54	IP65
	IP44	IP54	IP65
	IP44	IP54	IP65





<b>Mounting type</b>	Surface / Suspended
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP65 in standard
<b>Emergency unit</b>	On request
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Gray RAL9006 in standard
<b>Drivers</b>	On request
<b>Housing material</b>	Plastic
<b>Diffuser material</b>	Microprismatic diffuser in standard. Frosted / OPAL on request
<b>Temperature range</b>	-20°C ... +40°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
29	3000	4400	>80	230	50 000	IP65	100x90x1270	4340.4400/830
29	4000	4400	>80	230	50 000	IP65	100x90x1270	4340.4400/840
36	3000	5500	>80	230	50 000	IP65	100x90x1570	4340.5500/830
36	4000	5500	>80	230	50 000	IP65	100x90x1570	4340.5500/840

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP44	IP54	IP65
	IP44	IP54	IP65
	IP44	IP54	IP65



# DLN100 U-D



<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP54 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Standard Gray RAL 9006, other RAL colours on request
<b>Drivers</b>	On request
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	Microprismatic diffuser in standard
<b>Temperature range</b>	-20°C ... +40°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
9,2	2700	710	>80	230	15 000	IP54	Ø100x184	3419.710/827/36D
9,2	3000	740	>80	230	15 000	IP54	Ø100x184	3419.740/830/36D
9,2	4000	780	>80	230	15 000	IP54	Ø100x184	3419.780/840/36D

Mounting type			
Distribution direction			
IP Code	IP44	<b>IP54</b>	IP65






<b>Mounting type</b>	Surface
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP54 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Standard Gray RAL 9006, other RAL colours on request
<b>Drivers</b>	On request
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	Microprismatic diffuser in standard
<b>Temperature range</b>	-20°C ... +40°C
<b>Warranty</b>	5 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
10	3000	355	>80	230	50 000	IP54	150x150x150	6546.1100/830
10	4000	370	>80	230	50 000	IP54	150x150x150	6546.1100/840

- Mounting type
- Distribution direction
- IP Code

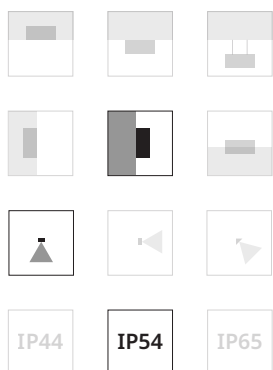

# ART DECK



<b>Mounting type</b>	Ground
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	24V
<b>IP Code</b>	IP67 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Gray in standard
<b>Drivers</b>	N/A
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard
<b>Temperature range</b>	-20°C ... +40°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
1,2	3000	85	>80	24	50 000	IP67	Ø40x10	024925
1,2	4000	85	>80	24	50 000	IP67	Ø40x10	024926

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP44	IP54	IP67



# ALT RAY



<b>Mounting type</b>	Ground
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP67 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Gray in standard
<b>Drivers</b>	N/A
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard
<b>Temperature range</b>	-20°C ... +40°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
12	3000	520	>80	230	50 000	IP67	Ø61x133	026447
12	4000	520	>80	230	50 000	IP67	Ø61x133	029700

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP44	IP54	IP67



# ECRAN



<b>Mounting type</b>	Ground
<b>Light color</b>	White
<b>Color temperature</b>	3000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP54 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Black in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	Microprismatic diffuser in standard
<b>Temperature range</b>	-20°C ... +40°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
9	3000	697	>80	230	50 000	IP54	176x118x900	029992

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP44	<b>IP54</b>	IP65



# FRAME H650



<b>Mounting type</b>	Ground
<b>Light color</b>	White
<b>Color temperature</b>	3000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP54 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Black in standard
<b>Drivers</b>	Integrated controller
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	Microprismatic diffuser in standard
<b>Temperature range</b>	-20°C ... +40°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
7	3000	361	>80	230	50 000	IP54	160x54x650	021929

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP44	<b>IP54</b>	IP65





# LTD LINE



<b>Mounting type</b>	Ground
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	220V - 240V
<b>IP Code</b>	IP67 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Gray in standard
<b>Drivers</b>	Integrated controller in standard
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	Microprismatic diffuser in standard
<b>Temperature range</b>	-40°C ... +60°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
8	3000	430	>80	230	50 000	IP67	210x63x78	024944

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP44	IP54	IP67
	IP44	IP54	IP67
	IP44	IP54	IP67



# LUMILINE



<b>Mounting type</b>	Ground
<b>Light color</b>	White
<b>Color temperature</b>	3000K / 4000K
<b>Voltage</b>	24V
<b>IP Code</b>	IP67 in standard
<b>Emergency unit</b>	N/A
<b>Movement sensor</b>	N/A
<b>Daylight sensor</b>	N/A
<b>Housing color</b>	Gray in standard
<b>Drivers</b>	N/A
<b>Housing material</b>	Aluminium
<b>Diffuser material</b>	OPAL diffuser in standard
<b>Temperature range</b>	-20°C ... +40°C
<b>Warranty</b>	3 years

power [W]	color temperature [K]	lumen output [lm]	CRI Ra	input voltage [V]	lifetime LED [h]	IP code	dimensions [mm]	product code
12	3000	520	>80	24	50 000	IP67	28x51x1000	027994
12	4000	520	>80	24	50 000	IP67	28x51x1000	032487

<b>Mounting type</b>			
<b>Distribution direction</b>			
<b>IP Code</b>	IP44	IP54	IP67
	IP44	IP54	IP67
	IP44	IP54	IP67





"Legal Notice"

Due to continuous product development ADD Sp.z o.o. reserves the right to modify, upgrade or change product versions without prior notice. Visualizations or photos of products may differ in detail from the actual products. Information contained in this catalog may contain technical inaccuracies or typographical errors. Every effort has been made to provide current, accurate and reliable information in the product catalog. The catalog is made public without any guarantee or warranty. In no event shall ADD sp. z o.o. be liable to anyone for any direct, indirect, consequential or other damages whatsoever resulting from any use of the catalog. The catalog serves as a general presentation of the offer and the basis for the execution of contracts is exclusively a binding offer prepared by the sales department of ADD sp. z o.o.

**ADD** sp. z o.o.

Grodziska 15 Street

05830 Stara Wies

Poland


TAX number: PL 5342614788

mobile: +48 660 099 951

email: [adam.ducek@addsupplier.com](mailto:adam.ducek@addsupplier.com)



[www.addsupplier.com](http://www.addsupplier.com)

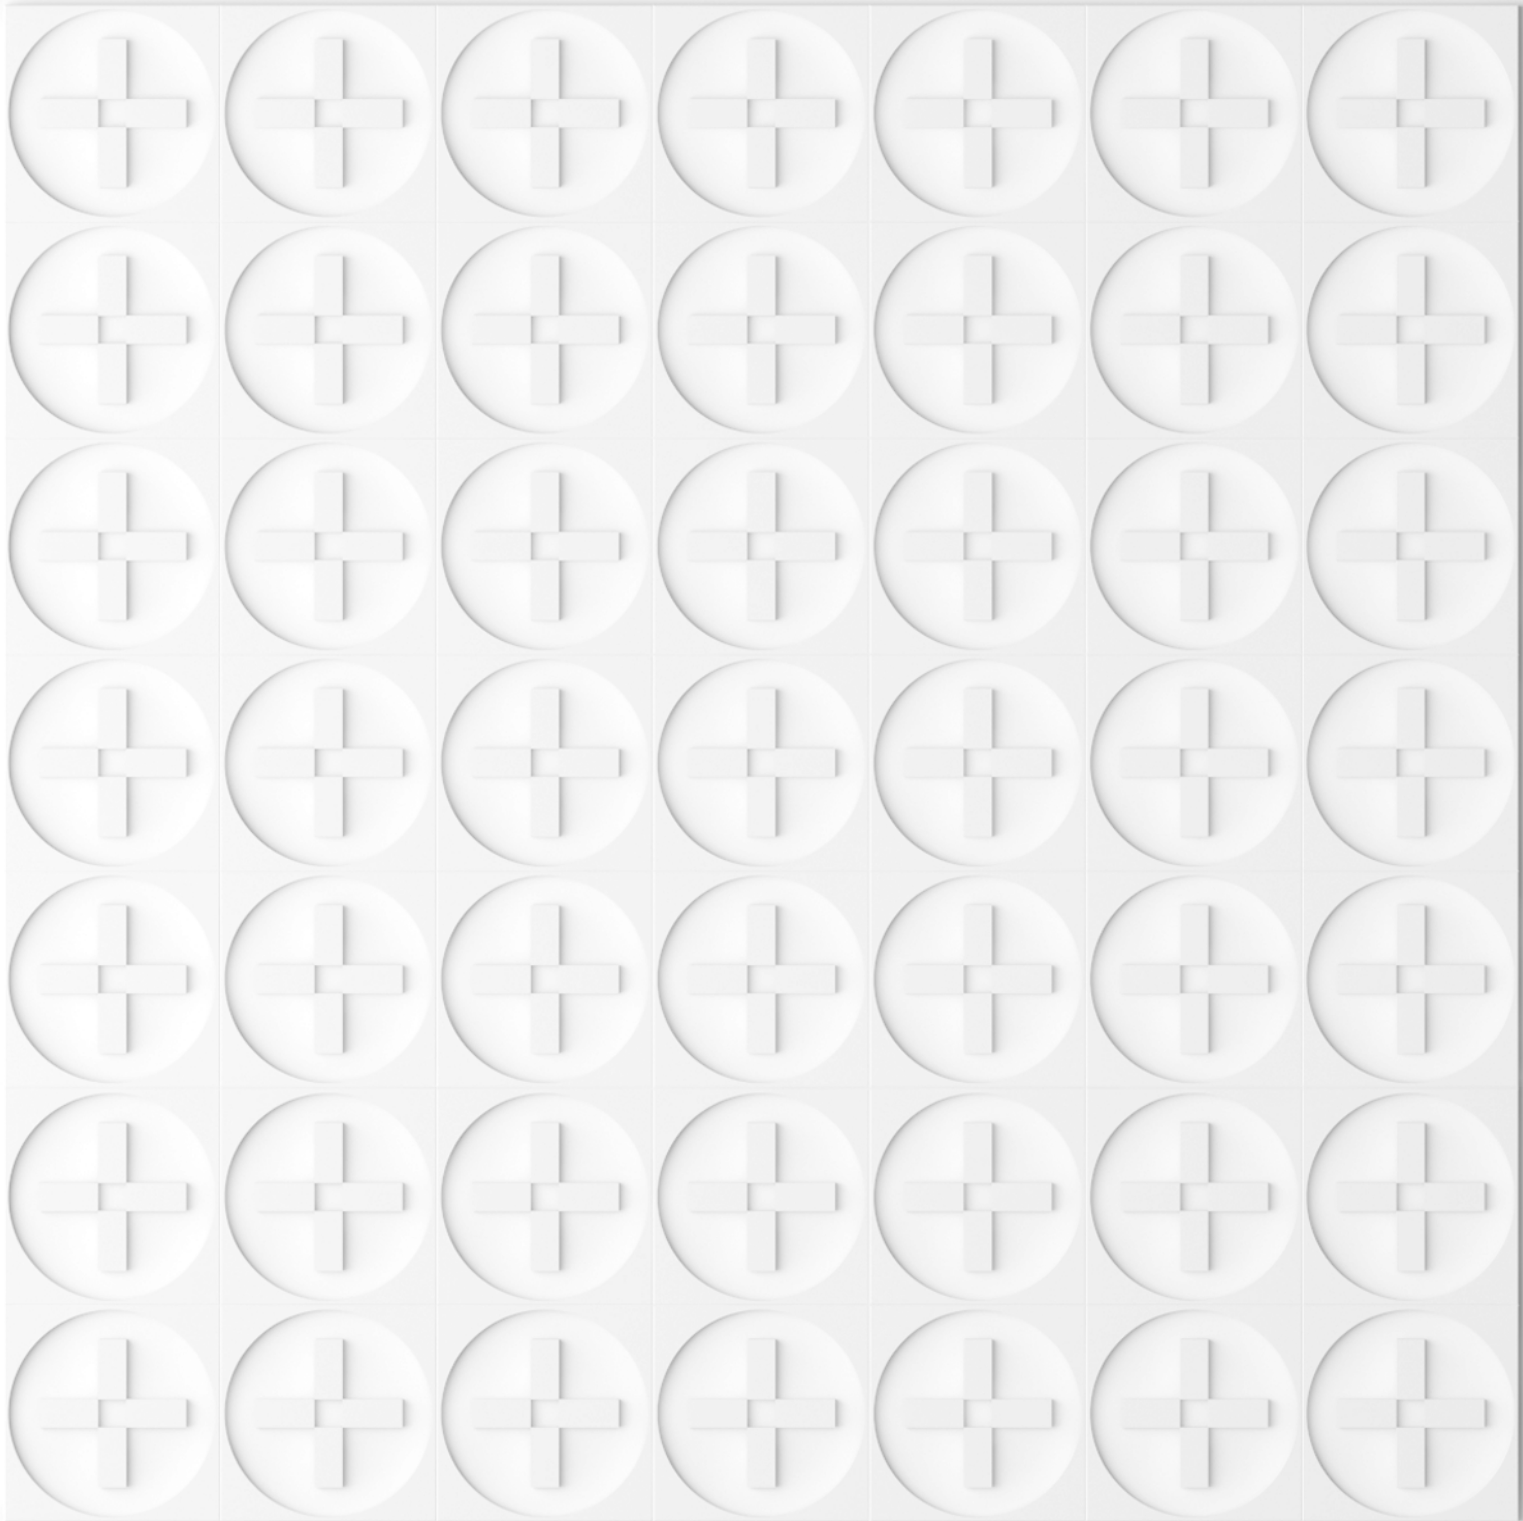

[www.addsupplier.com](http://www.addsupplier.com)

